

PISCINE GLOBAL EUROPE 2022

Architectural regulations

Contents

Section 1	General information <ul style="list-style-type: none"> - including obligations of the exhibitor and/or his stand designer relating to waste management 	P2
Section 2	Stand fitting file	P2
Section 3	Specific rules regarding stand fitting <ul style="list-style-type: none"> 3.1 Stand built on several islands 3.2 Stand with upper floor area/solid ceiling/stand with canopy 3.3 Stand flooring 3.4 Covering of hall pillars/posts 3.5 Structures <ul style="list-style-type: none"> 3.5.1 Ground-level 3.5.2 Overhead 	P3 P3 P3 P4 P4 P4 P5
Drawings	Areas where suspension from the roof is prohibited	P6
	Drawings for ground-level and overhead structures	P7
Section 4	A few reminders concerning the Eurexpo site	P10

1.1 General information

This document sets out the stand presentation and fitting standards that have been defined in order to uphold an exhibition style that is appropriate, coherent and convenient.

These standards incorporate the usual safety regulations applicable to shows, fairs and exhibitions that are included in the Fire and Safety Regulations, with which you must familiarise yourself.

All stand fittings and decorations must comply with:

- > the Architectural Regulations
- > the Fire Safety Regulations
- > the General Health and Safety Coordination Plan
- > the Eurexpo centre regulations

Obligations of the exhibitor and/or his stand designer relating to waste management:

Any exhibitor renting shell-scheme space or his stand designer/subcontractor is responsible for keeping the space in good condition and for clearing it at the end of the show. He shall return the space free of all waste, stand components, packaging, carpet, magazines, etc.).

If, at the end of break-down, the exhibitor or his stand designer has not duly removed and disposed of all waste: GL events Exhibitions, the show organiser, will invoice the exhibitor €200 exc. VAT/m³ (at least 1 m³ invoiced) to cover the cost of removing and disposing of said waste.

NB: please contact Eurexpo Exhibitor Services for information on skip hire
<http://www.eurexpo.com/-Services-Exposants->

2. Stand fitting file

Prior to construction, all stand designs must be submitted to the Architecture Department of SE Concept, which will grant or refuse permission to build the stand on-site. Any design that does not comply with the regulations in force will be rejected and, in particular, any stand erected without the Architecture Department's approval is liable to be dismantled at the exhibitor's expense.

Agreements between exhibitors are not permitted. Only the Organiser and SE Concept are authorised to grant dispensations on receipt of written applications.

Stand fitting designs must be submitted to the Architecture Department no later than

19th September 2022

To submit your plan for validation, a dedicated platform has been set up. To access it, go to your customer area <https://exposant.gl-events.com/login>, heading "Techniques" - Task "Consult the architectural rules and have your plans validated".

ASTECH PROD – Pascal REDON

Tel : +33 (0)6 83 25 95 12

pascal.redon@astech-prod.com



Exhibitors whose stand drawings have not been validated will not be granted access to the Eurexpo Convention and Exhibition Centre



3. Specific rules concerning stand fitting

3.1 Stand built on several islands

In the case of a stand built on several islands separated by aisles, it is impossible to fit signage or construct a continuous lighting truss structure running across the aisles.

3.2 Stand with upper floor area*/solid ceiling/canopy

(cf article T23, page 5 of the Fire Safety Regulations)



* Stands with an upper floor level require prior written permission from GL events Exhibitions (via sales Department)

A fee for building an upper floor (€150 exc. VAT /m²) must be paid by the exhibitor to GL Events Exhibitions.

Stands with upper floor areas are authorised under the following conditions:

- > The stand must be located on the hall perimeter
 - > The stand floor surface area must be greater than 100 m²
 - > The upper floor surface area is limited to 50% of the stand floor surface area, up to a maximum 300m².
 - > The maximum authorised height of the upper floor area is 5.00 m from ground level
- a) The exhibitor must draw up his design and send it, accompanied by drawings and structural calculations, to the exhibition architecture department (which will approve it and be responsible for passing a copy on to the safety manager).
(cf. "application form - stands with upper floor area/solid ceiling/canopy")
- b) An accredited agency must inspect erection on-site and draw up a certificate of conformity. Without this certificate, the Organiser reserves the right to refuse public access to the upper floor area.
- c) Non-exhaustive list of accredited agencies:
- | | |
|------------------------|--|
| APAVE | 4, rue des Draperies – 69450 – St Cyr au Mont d'Or
Tel: 33 (0)4 72 32 52 52 |
| BUREAU ALPES CONTROLES | 17, av Condorcet – 69100 - Villeurbanne
Tel: 33(0)6 88 84 25 76 |
| SOCOTEC | 11, rue St Maximin – 69003 – Lyon
Tel:33 (0)4 72 11 45 00 |

3.3 Fitting of stand flooring

All stands using a floor or any type of covering likely to create a step 2 cm high or more **must have one or more ramps** enabling disabled people to access them.
(cf. p. 9 of "specifications for use by exhibitors and stand lessees")

The normal slope must be no more than 5% and the ramp must be no less than 1 m wide.

If this is impossible, two cases will be tolerated on an exceptional basis:

- > 8% over a length not exceeding 2 m
- > 12% over a length not exceeding 0.50 m

3.4 Covering of hall pillars/posts

Pillars and posts may be covered up to a maximum height of 5 m above the ground. The covering may be supported by the pillar, but must be separated or, at the very least, insulated with soft material (felt, sponge, etc.) placed over the points of contact. The exhibitor will be billed for any damage caused.

Caution: fire hose cabinets are fixed to certain pillars/posts (cf. P9 "A few reminders concerning the Eurexpo site").

3.5 Structures

3.5.1 Ground-level structures (drawings No. 1, 2 and 3 p7, 8 and 9)

Heights

All heights are understood to be overall heights from the hall floor level

- > **Construction is limited to a maximum height of 5m:** in compliance with the required setback except for:
 - passageways 21/3/34/45/5 limited to 4 m
 - passageway 22 limited to 2.80m
 - gallery 2 limited to 4.00 m
 - gallery 4 limited to 3.90 m
- > Maximum height of stand partition walls 3 m
- > Maximum height of pools/shells on display
 - . 10 m on the perimeter of halls 4.1 and 4.2
 - . 7 m in the middle of halls 4.1 and 4.2
 - . 7 m on the perimeter and the middle of halls 5 and 6

Setbacks

Stands must be built taking into account the following setbacks:

- > With respect to the aisles: elements measuring up to 3 m: no setback
- > With respect to the aisles: elements measuring up between 3 m to 5 m: 1.00 m setback
- > With respect to adjoining stands: elements measuring 3 to 5.00 m: 1.00 m setback

Stand openings onto the aisles

- > All stand façades facing an aisle must be open on at least 60% of their length, even if they are set back with respect to the aisle.
- > All solid, decorative elements or glazed panels (transparent, frosted glass, net curtain, etc.) are considered as closures.
- > Elements allowing people to come through are considered as openings.
- > Low wall will be allowed with a maximum height of 1.1m
- > Products exposed will be authorised with a maximum height of 1.1m

Adjoining stands

Partition walls between adjoining stands must be smooth, made of one material, painted in white or covered with white or grey wall fabric **and free from any type of markings.**

Recycled stands

- > These reused stands are subject to the Piscine Exhibition Architecture Regulations, just like new stands.
- > They must comply with the required setbacks and heights.
- > They must be approved by the architecture department.

3.5.2 Overhead structures (drawings 1, 2 and 3 p. 7, 8, and 9)

(suspended signage/lighting truss structures)

Heights

All heights are understood to be overall heights from the hall floor level, taking into account required setbacks;

- > **6.00 m to the top of the signage**
- > 5.00m (maximum specific height): Halls 2.2/ 2.3A/ 3.2/ 5.2
- > between 4.00 m and 5.30 m, depending on the location in gallery 2
- > between 5.00 m and 6.00 m, depending on the location in gallery 6

Setbacks

For adjoining stands, overhead structures must respect a 1 m setback from the stand boundary.

No setback required for stands on islands.

Signage.

Suspended signage or any suspended decorative element must not descend below 3.50 m from the hall floor level.

Areas where suspension from the roof is strictly prohibited

- > Gallery 4
- > Gallery 2 (over the whole width and a 12 m length as of the Dome)
- > Gallery 6 (over the whole width and a 8.50 m length as of the Dome)
- > Passageways 21/22/3/34/45/5
- > Passageway between hall 4.1 and hall 4.2.B (over a 15 m width)
- > The perimeter of the halls over a 3m width
- > The centre of the Dome
- > The reception area
- > The areas where movable partition walls are placed (when they are closed):
 - in halls 4.2 and 6.3,
 - between halls 6.2.A and 6.1,
 - between halls 6.2.A and 6.2.B,
 - between halls 6.2 and 6.3
- > Northern footbridge
- > Southern footbridge




A feasibility study must be performed for any item suspended from the roof and submitted to Eurexpo


accrochage@eurexpo.com 33(0) 04 72 22 31 00

IMPORTANT: Depending on your stand location, the roof heights of certain passageways and galleries must be taken into account (see table below)


Overall roof heights from hall ground level	Halls, galleries, passageways
12.00 m	Halls 4.1/ 4.2/6.3.B/6.3.C
9.00 m	Halls 1/2.1/3.1/5.1/6.2/6.1/6.3.A/6.1
7.50 m	Halls 2.2/ 2.3.A/ 3.2/ 5.2
4.50 to 5.50 m	Gallery 2
4.40m to 8.20m	Gallery 6
3.90m	Gallery 4
4.10m	Passageways 21/3/34/45/5
2.85m	Passageway 22

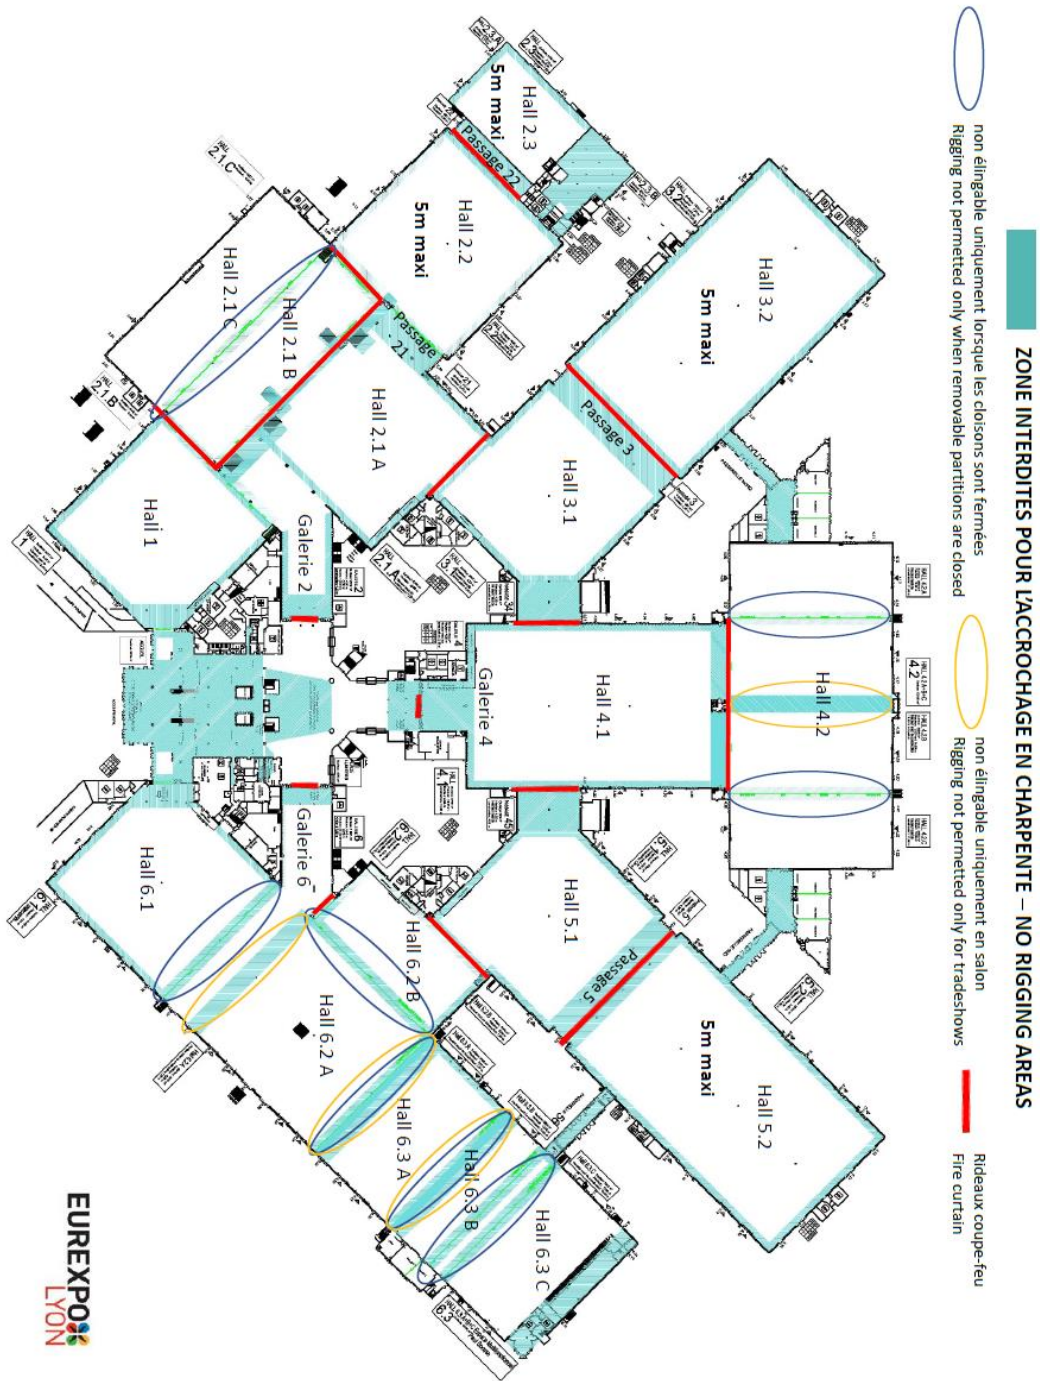


Drawing No. 1: island stand open on all four sides

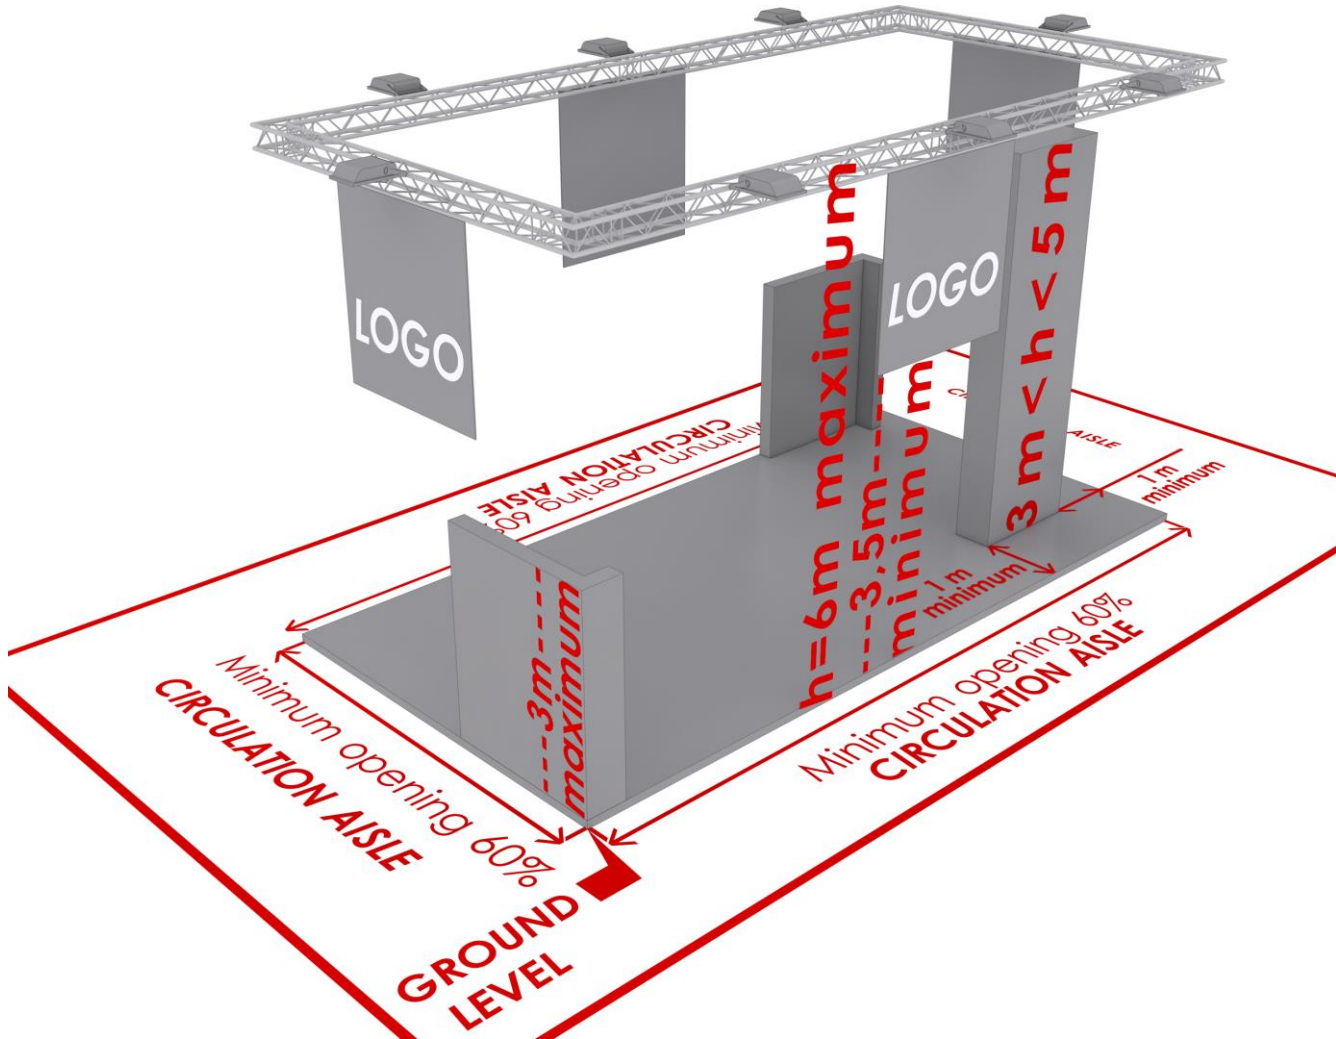

Drawing No.2: Adjoining stands

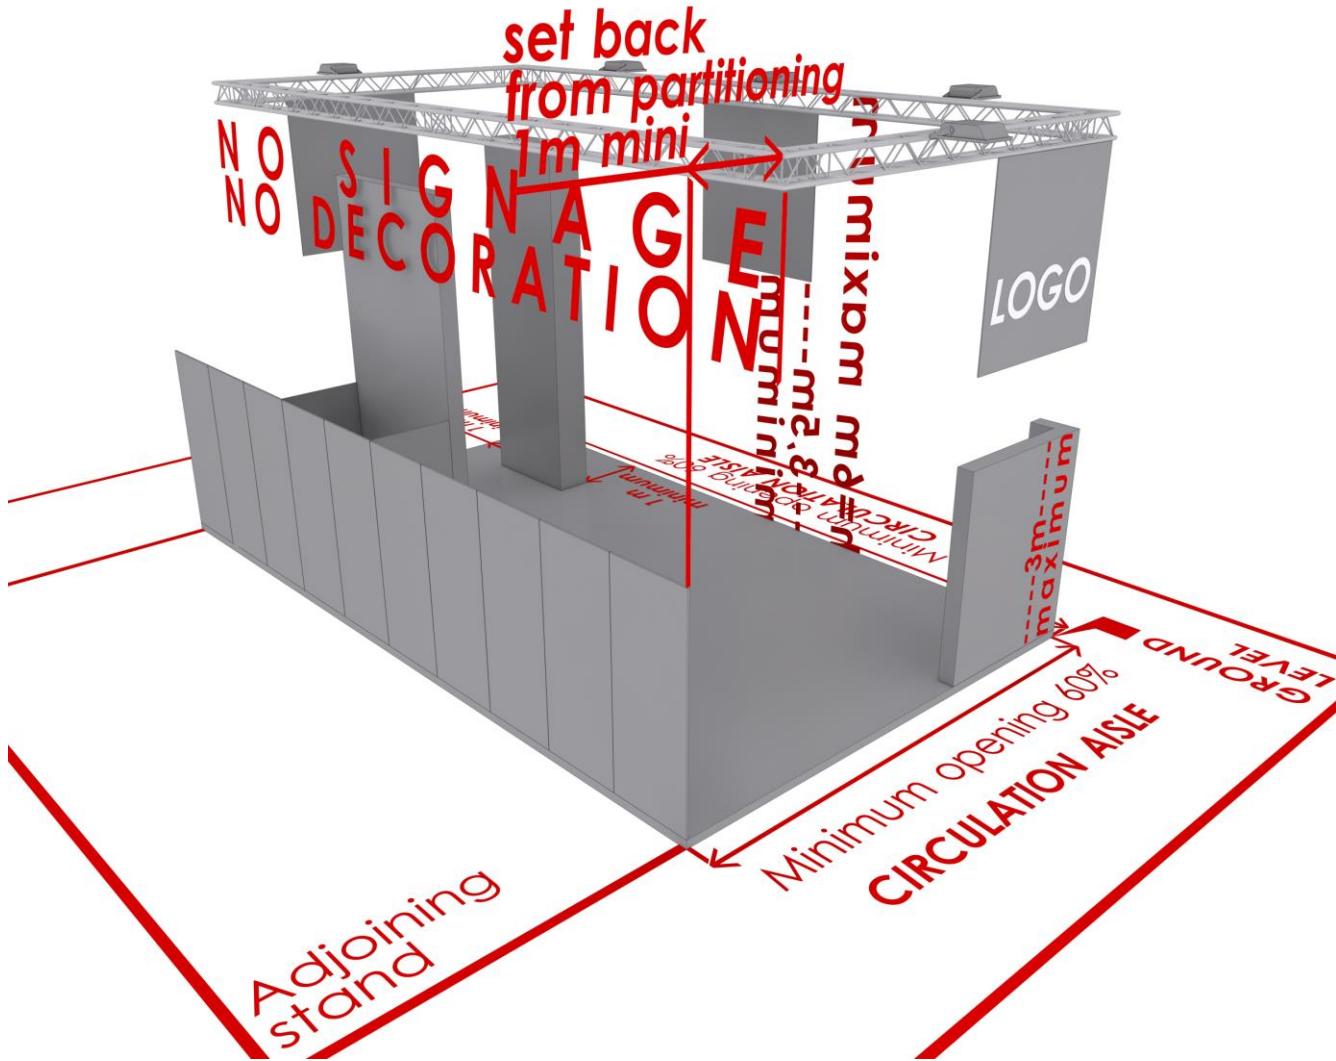

Drawing No.3: Adjoining stands

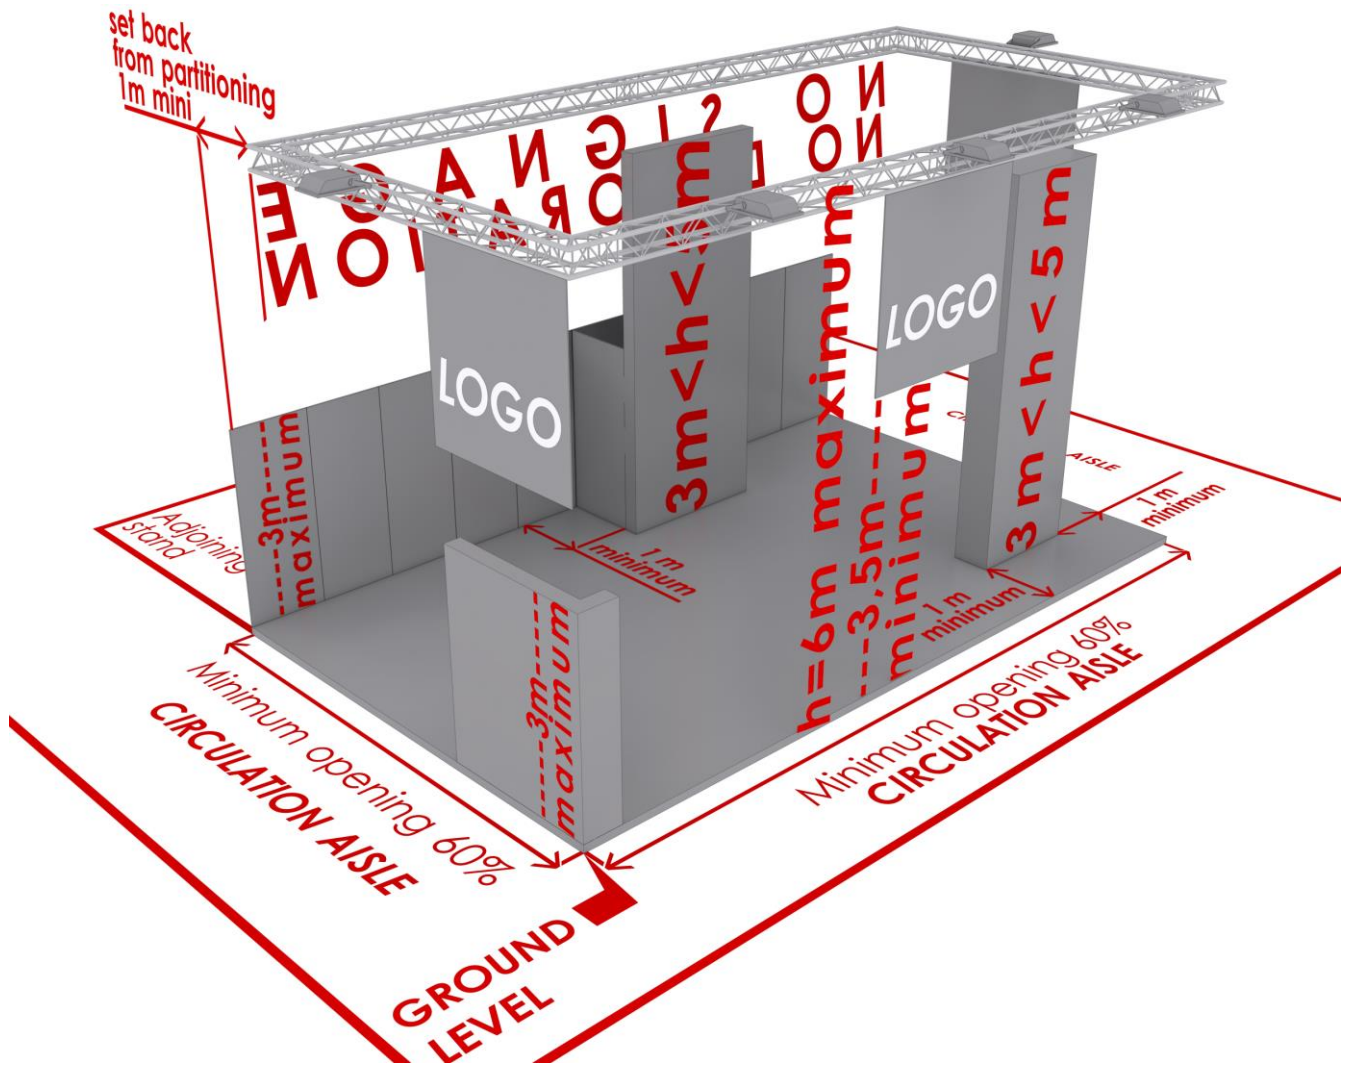

4. A few reminders concerning the Eurexpo site

4.1 Permissible loads on:

- Hall floors 1.5 tonne/m²
- Dome floor 500 kg/m²
- Reception area floor 500 kg/m²

3.2 Construction of raised structures against hall walls:

These are permitted provided that the vertical structure of the halls (RSJ columns, bracings) are not placed under pressure

1.2 Fire hose cabinets

- The exhibition halls are equipped with fire hose cabinets containing 30 m fire hose reels.
- The fire hose cabinets are located against the main columns of the halls and near the emergency exits.
- An area measuring 1 m from the front and the sides of the fire hose cabinets must be kept clear at all times

1.3 Doors

Doors must never be obstructed or blocked up. They must be opened and closed by the security staff.

Note: the motorised doors are 6m wide and vertical clearance beneath doors varies from 4.50 m to 8 m from one hall to another.

1.4 Stand electrical installations

It is strictly forbidden to use Eurexpo's private installations (notably the cable ducts in the halls) for electric cables used by stands.

1.5 Access inside halls

No access for any vehicle (except exhibited vehicles)

1.6 Handling of heavy objects

This must be carried out by specialist firms.

NB: The following are strictly prohibited:


- screwing, painting or marking floors
- screwing, painting or drilling holes into partitions, walls or columns.

Rules for accessibility for people with disabilities

It's compulsory :

For all stands with floor > 2 centimetres to create one or several ramps for person with disabilities

Recommendations for exhibitions of monobloc pools or saunas

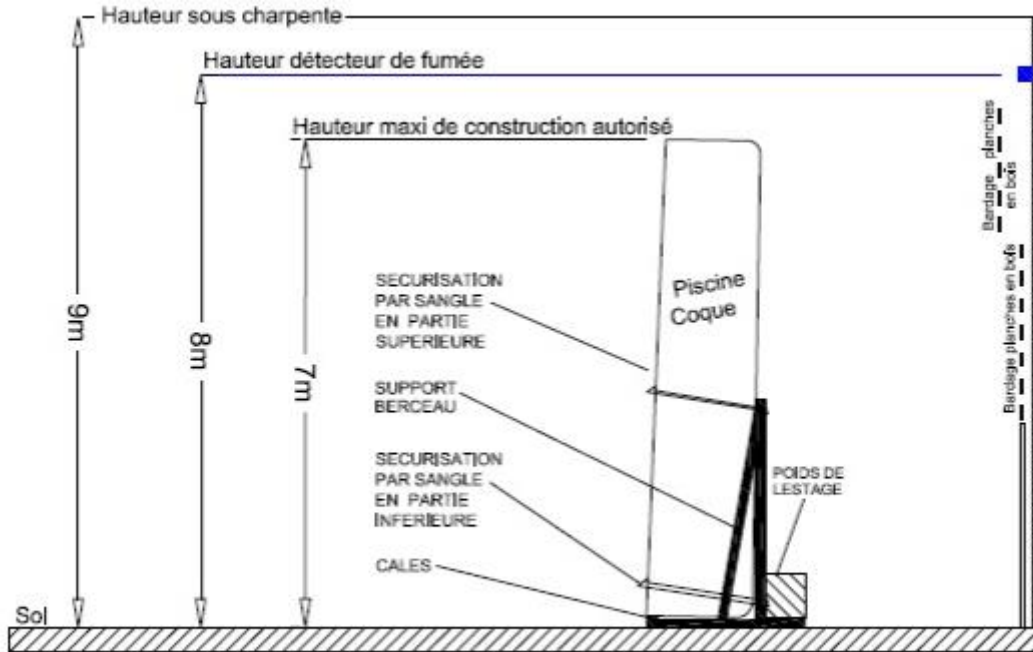

A metallic support will be necessary to secure the pool